


PIR-Sensor Switch Series

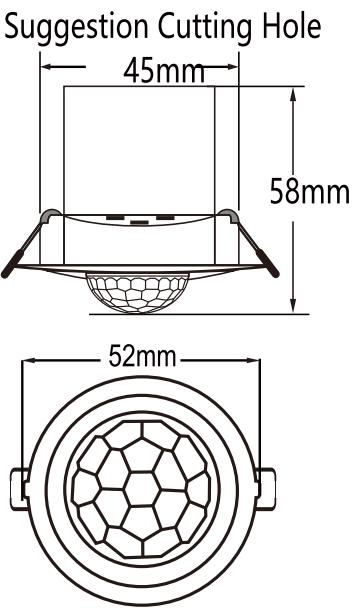

|                           |                                        |           |               |           |
|---------------------------|----------------------------------------|-----------|---------------|-----------|
| Model No.                 | 21-464XA                               | 21-454XAK | 21-464MA      | 21-464MAK |
| Working Voltage           | AC100-240V 50/60Hz                     |           |               |           |
| Controllable load         | ≤300W≤3 lamps                          |           | ≤100W≤5 lamps |           |
| Standby power consumption | ≤1W                                    |           |               |           |
| Start Lux Setting         | ≤2Lux/≤25Lux/≤2000Lux(Gear selection)  |           |               |           |
| Induction radius          | 50%/75%/100%(Gear selection) , 2m Max) |           |               |           |
| Time delayed              | 3secs/45secs/4mins(Gear selection)     |           |               |           |
| Detection angle           | 110°                                   |           |               |           |
| Mounting height           | 3.5m Max                               |           |               |           |
| Operating temperature     | -20℃~45℃                               |           |               |           |
| IP rating                 | IP 20                                  |           |               |           |
| Size(mm)                  | φ52×H 58 (suggest to install φ45mm)    |           |               |           |
| Packing                   | 200pcs / carton                        |           |               |           |