


水泥電阻器 SQH系列


Cement Resistors SQH Series

■ 外形尺寸 DIMENSIONS

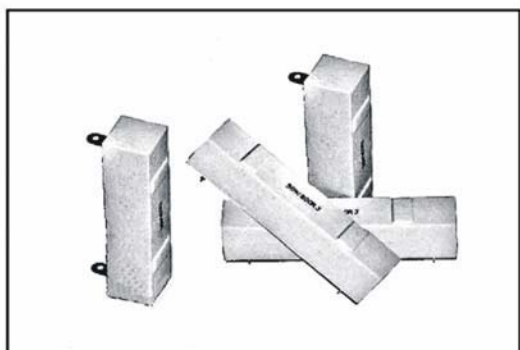

** SQHG is SQH with metal mounting.

** SQHG 是 SQH 加鐵架(固定架)

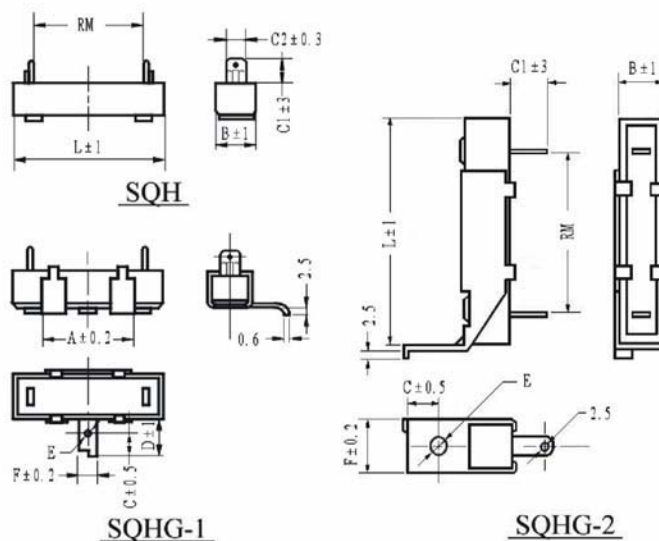

■ 技術說明 (TECHNICAL SPECIFICATIONS)

型號 (Type)	額定功率 Rated Power(W) Ambient temperature=70°C	阻值範圍(Resistance range)		外形尺寸 Dimensions(mm)									
		最小值(Min.)	最大值(Max.)	L	RM	B	C1	C2	A	C	D	E	F
SQH10W	10.0	5R1	1K5	48.0	34.0	10	9	5	25	6	11.8	4.0	12
SQH15W	15.0	5R1	1K5	48.0	34.0	13	9	6	25	6	12.5	4.0	12
SQH20W	20.0	5R1	2K4	63.5	49.0	13	9	6	25	6	12.5	4.0	12
SQH25W	25.0	6R2	2K4	63.5	49.0	16	12	7.5	25	6	13.8	4.2	12
SQH30W	30.0	6R2	8K2	75.0	56.0	19	12	7.5	40	8	18	4.2	18
SQH50W	50.0	6R2	10K	90.0	71.0	19	12	7.5	40	8	18	4.2	18

■ 特性 CHARACTERISTICS

試驗項目 TEST ITEM	性能要求 SPECIFICATIONS
精度 (Tolerances)	±5% (J) ±10% (K)
溫度系數 (Temperature coefficient)	±250 10 ⁻⁶ / °C
絕緣電壓 (Insulation voltage)	700V
絕緣電阻 (Insulation resistance)	>1GM Ω
氣候類型 (Climatic category)	55/155/21
溫度範圍 (Temperature range)	-55 ~ 275°C
長期試驗 (Load life)	ΔR ≤ ± (5% R + 0.1Ω)
穩態濕熱 (Damp heat, steady)	ΔR ≤ ± (5% R + 0.1Ω)
引出強端度 (Terminal tensile strength)	ΔR ≤ ± (1% R + 0.05Ω)
耐焊接熱 (Resistance to sold, heat)	ΔR ≤ ± (1% R + 0.05Ω)
可焊性 (Solder ability)	IEC68 -2 - 20(1968) 槽焊法, 235°C ± 5°C, 2 ± 0.5s(solder bath method)