




Model No. CT-F303025-12 (22W/850lm)

Feature:

- ◆ Frame size: Standard
- ◆ Frame material: Aluminum metal
- ◆ Voltage Type: Constant current
- ◆ On lighting: Transient to start
- ◆ Input Voltage: AC220-240V / 50/60Hz
- ◆ Light source: LED SMD5630/4014 chip diode
- ◆ Shine: To product light not flashing
- ◆ Panel: Ultra-thin guiding light, Energy conservation

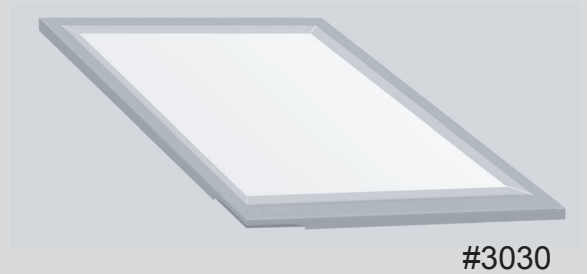

#3030

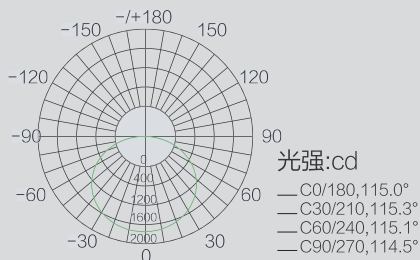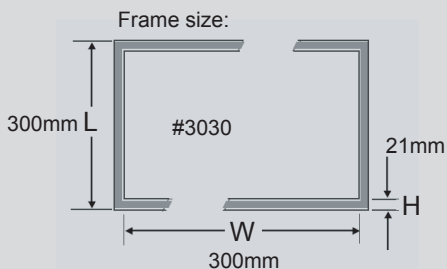


平均光束角 (50%) : 115.0°

Characteristic Parameters:

型號 Model:	CT-F303025-11
尺寸 Dimension (L*W*T):	300*300*15mm
發光尺寸 The Emitting Size:	258*258mm
輸入電壓 Input Voltage (High efficiency):	AC110V~240V 50/60Hz
輸出電壓 Output Voltage:	24.8V/31V DC
電流 Current:	0.35A/0.3A
類型 LED Type:	SMD5630/4014
數量 LED Quantity:	24pcs/50pcs
功率 System Power (W):	11W ±5% (75lm/W)
光通亮 LED Flux (lm):	850lm ±5% / 120lux/2M
燈具效率 Lighting Factor:	60%
色溫 Color Temperature (K)	3800K ±7%; 6000K ±8%
顯色指數 Color Rendering Index:	>80
發光角度 Illumination Angle:	120°
壽命 Lifespan:	50000hrs
環境溫度 Ambient Temperature (°C):	-20°C ~ 50°C
重量 Weight (Kg):	<1.0/kg
認證 Certificate:	CCC, UL, CE, GC, RoHS, FCC.

* If you have any question which is not in this specification , please contact us. (在本規格書裡如果您未能找到或參數指標未能達到你的應用要求, 即未在本規格書裡表現出來, 請與我們聯絡)

◆ Comparison of defferent size:

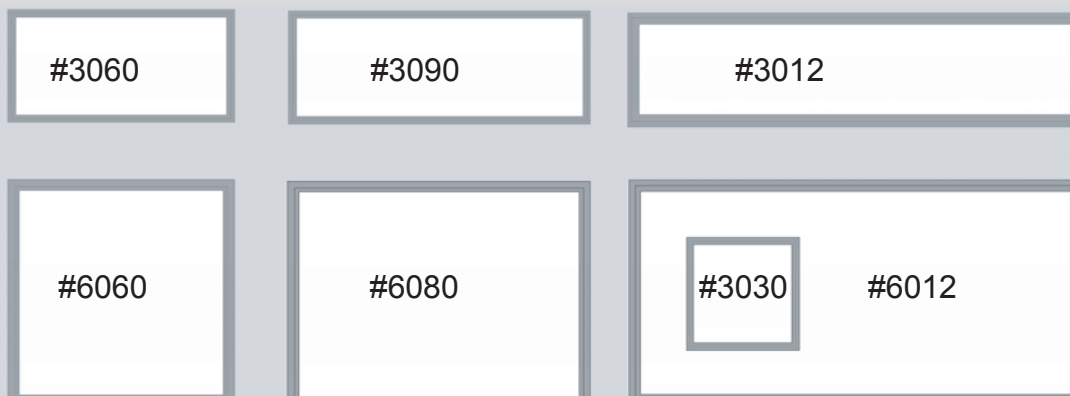

* If you need others special size please contact us. (如果你需要其它非標尺寸請與我們聯絡).



CT-F303025-11