

SINLOON®

LED 可控硅調光器

LED Triac Dimmable

Model: AHTGQ147

Power: 200W

■ Features (特性)

寬電壓輸入 220-240V Wide voltage Input 220~ 240V。  
後切相調光波形信號。Output Trailing Edge dimming waveform signal  
與LED可調光驅動器配套使用。Use to LED dimmable driver  
帶開關,開關最大電流 2A,標準的接線端口。  
Carry with switch, the maximum current 2A, standard of wiring port.  
符合國標86面板 Accord with national standards 86 panel  
接線方便簡單(僅2線),旋轉即可無級調光,不頻閃。  
Wiring simple only 2-wires, rotating to stepless dimming, No strobe.





■ 主要技術參數 Main Technical Specifications

輸入電壓 Input Voltage	頻率 Frequency	調光信號 Dim signal	開關電流 SW Current	工作溫度 Temperature
AC200V-240V	50/60z	Trailing Edge 後切相	2A max	0-50°C

■ 實物圖片和尺寸

Product Pictures and Measurement

尺寸 Dimensions (mm)		
L	W	H
87	87	55

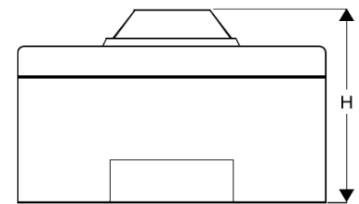

■ 包裝 Packaging

紙箱 Corrugated Box	箱裝 Qty (pcs)	箱尺寸 Box Size(mm)	箱體積 Box Volume(m3)	重量 Weight (kg) N.W(kg) G.W.
Tan/five layer	36	380x340x190	0.025	Tan/five layer

● 白色紙盒單獨包裝 Each dimmer packing White paper box.

■ 調光器接線圖 Dimmer wiring

