


SINLOON®

聚光射燈/泛光燈  
LED Floodlight

XGH series  
Power:60W/100W

■ Applications

It is suitable for using in parks, hotels, bars, gardens, buildings, lamp posts, playing grounds, stadiums.

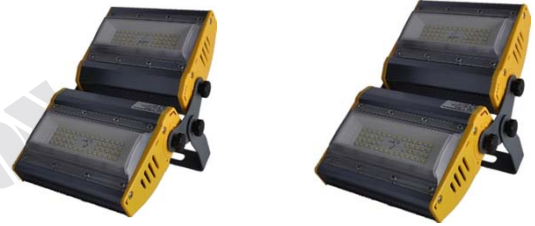

■ Data Specification

	Model No.		XGH60CW-SA	XGH100CW-SA
	Technical Information	Wattage	[W]	60W±5%
Input Voltage		[V]	AC170-265V	AC170-265V
Power Factor		[pF]	≥0.5	≥0.9
Op. Frequency		[Hz]	50/60Hz	50/60Hz
Luminous Flux		[lm]	≥6000LM	≥10000LM
Efficiency		[lm/W]	>100	>100
CRI		[Ra]	>70	>70
CCT		[K]	2700-7000K	2700-7000K
LED Driver(brand)			RAYSHINE DRIVER	RAYSHINE DRIVER
Output Voltage		[V]	24-36V	24-36V
Output Current		[mA]	800mA±3%*2	1300mA±3%*2
Kind of LED		[SMD]	SMD2835*60	SMD2835*96
Brand of LED Chip			SAN'AN	SAN'AN
Beam Angle			120°	120°
Average Life		[hrs]	50000	50000
Maintenance Luminous Flux		[hrs]	50000	50000
Ta - Working Ambient Temp.		[°C]	-40°C to +60°C	-40°C to +60°C
Tc - Working Temperature		[°C]	+65°C	+65°C
IP - Index Protection		IP	IP65	IP65
Reflector Material			-	-
Difusor Material		PC	PC	
Body Material		stretching Alu.	stretching Alu.	
Weight	[Kg]	1.62kgs	1.94kgs	
Dimensions of Product (L x W x H)	[mm]	275*150*140 mm	275*200*140 mm	
Certificates		RoHS/CE	RoHS/CE	
Warranty by Supplier		2 Years	2 Years	
Inner	Kind of Packing		white box	white box
	Barcode		-	-
	Dimension (L x W x H)	[mm]	195*175*165 mm	260*175*165 mm
	Pcs/Ctn	Un/Cx	1pc/Cx	1pc/Cx
Outer	Kind of Packing		Export carton Packing	Export carton Packing
	Barcode		-	-
	Weight	[kg]	15.2kgs	17.5kgs
	Dimension (L x W x H)	[mm]	410*365*350 mm	535*365*350 mm
	Pcs/Ctn	Un/Cx	8pc/Ctn	8pc/Ctn

在本規格書裡如果您未能找到或參數指標未能達到你的應用要求即未在本規格書裡表現出來請與我們聯絡。