

Feature:

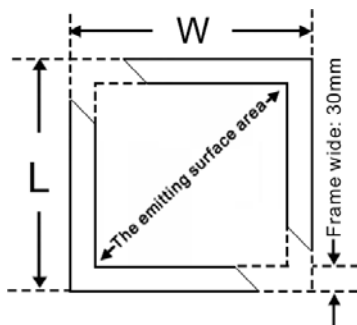
Frame measurement Standard size.  
 Frame material: Aluminum metal  
 Voltage Type: Constant current (External adaptor)  
 Temperature Color: White  
 Input voltage: AC110~240V 50/60Hz  
 Light source: LED SMD5630 type  
 Shine: To product light not flashing  
 Framework: Arc angle shaped  
 Panel: Ultra-thin guiding light, Energy conservation

 Figure Characteristic Parameters:

型號 Model No.:	MLL-A6080D (Double Panel)	MLL-A6080S (Single Panel)
尺寸 Dimension (L*W*H):	644*891*16.5mm	644*891*11.2mm
發光尺寸 The Emitting Size:	854*831mm	584*831mm
輸入電壓(外置電源) Input Voltage (External Adaptor):	AC110V~240V 50/60Hz	AC110V~240V 50/60Hz
輸出電壓 Output Voltage: (AC/DC Adaptor)	28.8V DC	28.8V DC
電流 Current:	1.2A	1.2A
類型 LED Type:	SAMSUNG LED - SMD5630	SAMSUNG LED - SMD5630
數量 LED Quantity:	90pcs	90pcs
功率 System Power (W)	40W ±5%	40W ±5%
亮度 Brightness (on the surface panel)	3500 Lux	7000 Lux
色溫 Color Temperature (K)	Color: White 6000K ±8%	Color: White 6000K ±8%
顯色指數 Color Rendering Index:	80±2	80±2
發光角度 Illumination Angle:	120°	120°
壽命 Lifespan:	40000hrs (25°C)	40000hrs (25°C)
環境溫度 Ambient Temperature (C):	-20°C ~ 50°C	-20°C ~ 50°C
重量 Weight (Kg):	<8.0/kg	<6.5/kg
認證 Certificate:	BSMI/CE/RoHS/FCC	BSMI/CE/RoHS/FCC

\* If you have any question which is not in the specification, please contact us.

\*在本規格書裡如果您未能找到或參數指標未能達到你的應用要求即未在本規格書裡表現出來請與我們聯絡。

 Dimension:

Think (T): Double Panel: 16.5mm

Single Panel: 11.2mm

Frame: wide: 30mm

\* If you need others special frame size, please contact us.

(如需要其它特殊框架尺寸請與我們聯絡)。

A6080 (40W)