

## 產品目錄:

## DIRECTORY INDEX:

# IV

# CONTENTS

## RESERVE BATTERY TYPE LED LAMP



### ☐ Products Main menu.

Model Part No.	Wattage	Flux	Color Temperatur	Switching*	Page:
IX 目錄	Directory Index				IX-P85
SSNEB-05	5W	400lm	Y=3000K W=6500K	+S = To have	IX-P86
SSNEB-07	5W	400lm	Y=3000K W=6500K		IX-P87
SSNEB-09	7W	560lm	Y=3000K W=6500K		IX-P87
SSNEB-12	7W	560lm	Y=3000K W=6500K		IX-P88
SSNEB-15	9W	720lm	Y=3000K W=6500K		
SSNEB-20	9W	720lm	Y=3000K W=6500K		

### ☐ Order Information:

Model Part No. + Color Temperature

Example: SSNB-05S-Y

### ☐ Switching\*

+S = To have

+S = 有開關擊

### ☐ 產品優勢

#### The advantage of products:

- ☐ 特點  
Feature  
可當在停電時提供照明。  
Can provide lighting for people during in the case of power failure.
- ☐ 儲電效率  
Reserve efficiency  
斷電後提供4-8小時亮燈的電力。  
The internal battery on the lamp bulbs provides up to 4-8hours of continuous use.
- ☐ 環保節能  
Eco  
環保節能高效,無紫外線,無污染。  
Green & efficient energy conservation, no ultra-violet and pollution.
- ☐ 穩定耐用  
Stable and Durable  
穩定耐用,使用壽長達30,000小時,極低光衰。  
Height quality warranty for 30,000 hrs, very low in light deterioration.
- ☐ 逃生照明  
Emergency Light  
因故停電時,自動亮燈,可做為應急照明或逃生照明。  
The system will automatically switch to batter power supply mode to provide light to power fail
- ☐ 開關功能  
Switching Function.  
原電燈 開/關制(熄燈/亮燈)可控制 SSNEB 燈泡系列  
The original control switch can turn ON / turn OFF SSNEB series products.
- ☐ 使用  
To use  
不需要增加任何附件和改變現有的電路,可以直接替換來的燈泡。  
And that no need to add attachments and change any line .
- ☐ 優勢  
Superiority  
儲電式照明無論在有電或斷電狀態下都能正常亮燈。  
Electricity storage type lighting both in electricity or power-failure can be normal lighting.

※ 美隆照明產品規格技術規範的典型參數的改變或更新不會預先發佈。  
Mayloon Lighting Co., Ltd., The characteristic parameters of electronic improvement and change or update without no



SINLOON®

儲電式LED應急照明燈泡

UPS-LED球泡無憂停電困擾

Reserve battery type LED Emergency Light, Keeps on illumination even without electricity supply.


# ☐ Feature:

- Reserve Battery type: (儲電式) Provide lighting during in the case of power outages.  
電力中斷時持續提供電源照明。
- Input Voltage: (寬壓電源) Wide Range mains voltage AC85 ~ 265V 50/60Hz
- Power Rated: (功率) 5W - 20Watts. (80lm/W)
- Lumen (流明) 400lm - 1600lm
- Function: (功能) Can control the ON/OFF switch over without electricity supply.  
電力中斷可以照常控制電燈開關。
- Battery Time: (電池) The internal battery on the Lamp provides up to 4~8 hrs of power supply.  
內置電池耗用時間4~8小時。
- Advantage: (優勢) Lighting for a long time, Can use continuously 8 hours.  
儲電用電可以維持長達8小時亮燈。

# ☐ Figure



# ☐ Dimension:

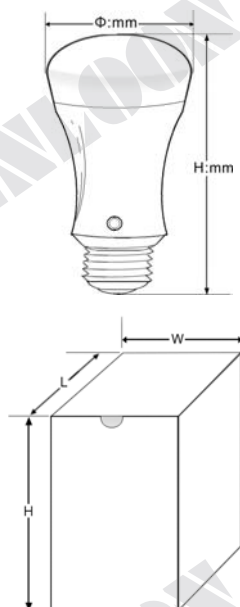

# ☐ Characteristic Parameters:

型號 Model No.:	SSNEB-09	SSNEB-12
尺寸 Dimension (Φ*H):	Φ60*105mm	Φ70*120mm
功率 (瓦) System Power (W) :	9W 80lm/W	12W 80lm/W
輸入電壓 Input Voltage :	AC85V~265V 50/60Hz	AC85V~265V 50/60Hz
耗時 Reserve battery time :	5 ~ 6 Hrs	6 ~ 7 Hrs
類型 LED Type:	COB-SMD5730	COB-SMD5730
光通亮 LED Flux (lm):	720lm	960lm
燈具效率 Lighting Factor:	70%	85%
功率系數 Power Factor:	>0.9	>0.9
色溫 Color Temperature (K)	3000K~6500K ±7%	3000K~6500K ±7%
顯色指數 Color Rendering Index:	>82	>82
發光角度 Illumination Angle:	135°	135°
壽命 Lifespan:	30000hrs	30000hrs
環境溫度 Ambient Temperature (C):	-20°C ~ 50°C	-20°C ~ 50°C
重量 Weight (Kg):	~170g	~170g
認證 Certificate:	CE, RoHS, CQC, IP20.	
包裝彩盒尺寸 Packing in box size (L*W*H)	62.5*62.5*110mm	72.5*72.5*125mm

\* If you have any question which is not in the specification, please contact us.

\*在本規格書裡如果您未能找或參數指標未能達到你的應用要求即未在本規格書裡表現出來請與我們聯絡。

# ☐ Packing(包裝):



Gift box 1 pcs

# ☐ Carton (紙箱):



Carton Size: (L\*W\*H)

735\*365\*250mm

Model No. Quantity Weight

SSNB-09 100 Ctns ~17.5kg

SSNB-12 100 Ctns ~17.5kg