

SINLOON®

無極燈光源

Induction light source (Olive Type)

Model No. MLL-PO Series

Lifetime: 100,000hrs

Feature:

- Power Range: 135W ~ 300W
- Efficiency: 65~90lm/W
- The Lifetime: 100,000 hrs
- Ambient Light: Instant start
- Shine: Not flashing
- Lighting Direct.: Arbitrary

Figure: Olive type



Order information:

Example: Model + Electronic Ballast

MLL-PO-135 + Electronic Ballast

Characteristic Parameters:

型號	功率	電壓	光通量	尺寸	光效	顯色指數	工作頻率	形狀
Model	Power *	Voltage (V)	(lm)	Size: Φ*H (mm)	lm/W	CRI (Ra)	KHz	Type
MLL-PO-135	135W	160V-265V	10125-11205	120*200	75-83	≥80	230±30	Olive
MLL-PO-150	150W	160V-265V	11250-12000	120*220	75-83	≥80	230±30	Olive
MLL-PO-165	165W	160V-265V	12375-13965	130*220	75-85	≥80	230±30	Olive
MLL-PO-180	180W	160V-265V	13500-15300	130*220	75-85	≥80	230±30	Olive
MLL-PO-200	200W	160V-265V	15000-17000	130*220	75-90	≥80	230±30	Olive
MLL-PO-250	250W	160V-265V	18750-28050	140*235	75-90	≥80	230±30	Olive
MLL-PO-300	300W	160V-265V	22500-28050	140*235	75-90	≥80	230±30	Olive
Color temperature		色溫:	2700K-6500K					
Temperature		環境溫度:	-25 ~ +50℃					
Lifetime		使用壽命	100000hrs					

Power *: The power means the lamp power and the high-frequency generator and power.

(* : 指功率和高頻發生器功率之和)

◆ Characteristic parameters of electronic product specification change or updates without prior notice.


(注意: 產品參數的任何改變和更新不會另行通知)

Application:

- Playground (操場)
- Shop market (商場)
- Supermarket (超市商店)
- Lobby (大堂)
- Large building (高樓大廈)
- Tunnels (隧道)
- Road (路燈)
- Etc. (等等)



Dimension:

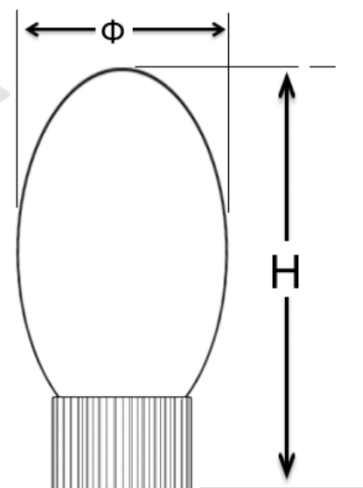

◆ If you have any question which is in the specification, please contact us.

(在本規格書裡如果您未能找到或參數指標未能達到你的應用要求即未在本規格書裡表現出來請與我們聯絡。)