


## 可覆式保險絲

### PPTC RESETTABLE FUSE

### Strap Type - LR Series

#### Construction and Dimension:

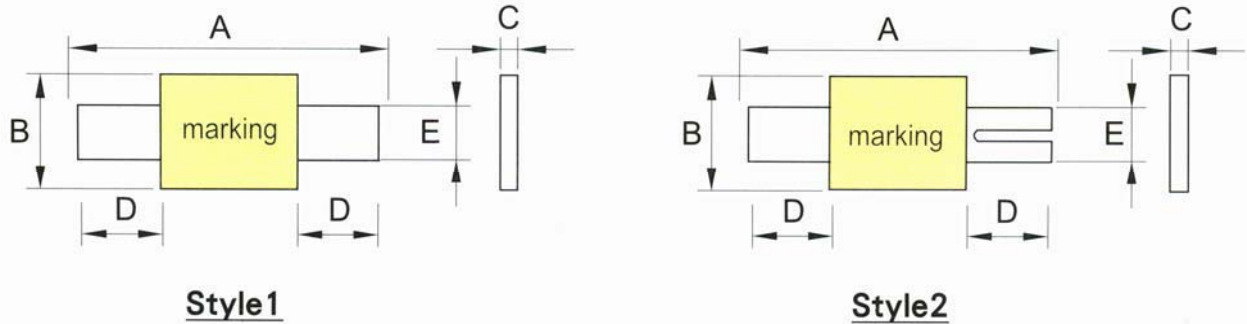

Unit:mm

Model	A		B		C		D		E		Style
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
LR190	20.0	22.1	4.8	5.3	0.5	1.1	4.7	6.7	3.8	4.2	1
LR190S	20.0	22.1	4.8	5.3	0.5	1.1	4.7	6.7	3.8	4.2	2
LR260	20.5	23.1	4.8	5.3	0.5	1.1	4.0	6.0	3.8	4.2	1
LR260S	20.5	23.1	4.8	5.3	0.5	1.1	4.0	6.0	3.8	4.2	2
LR380	23.5	26.0	9.8	10.5	0.5	1.1	5.0	7.0	5.7	6.3	1
LR450	23.5	26.0	9.8	10.5	0.5	1.1	5.0	7.0	5.7	6.3	1
LR550	34.5	37.0	6.7	7.3	0.5	1.1	5.0	7.0	4.7	5.3	1
LR600	23.5	26.0	12.7	13.3	0.5	1.1	4.0	6.0	5.7	6.3	1
LR730	27.0	29.1	14.0	14.5	0.5	1.1	4.0	6.0	5.7	6.3	1

\*Slit size:0.5mm x 4.0mm (Nominal)

#### Electrical Characteristics at 23°C:

Model	V Max. (Volts)	I Max. (Amps)	I hold (Amps)	I trip (Amps)	R min (Ω)	R min (Ω)	R1 max (Ω)	P(d) (Watts)
LR190	16	100	1.9	3.9	0.039	0.072	0.102	1.2
LR190S	16	100	1.9	3.9	0.039	0.072	0.102	1.2
LR260	16	100	2.6	5.8	0.020	0.042	0.063	2.5
LR260S	16	100	2.6	5.8	0.020	0.042	0.063	2.5
LR380	16	100	3.8	8.9	0.013	0.026	0.037	2.5
LR450	20	100	4.5	8.9	0.011	0.020	0.028	2.5
LR550	20	100	5.5	10.5	0.009	0.016	0.022	2.8
LR600	20	100	6.0	11.7	0.007	0.014	0.019	2.8
LR730	20	100	7.3	14.1	0.006	0.012	0.015	3.3