




SINLOON®
POWER SEMICONDUCTORS

SB2520FCT - SB25100FCT

25A Dual Schottky Barrier Rectifier

FEATURE:

- ◆ Schottky Barrier Chip.
- ◆ Guard Ring for Transient Protection.
- ◆ Low Forward Voltage Drop.
- ◆ Low Reverse Leakage Current.
- ◆ High Surge Current Capability.
- ◆ Plastic Material has UL Flammability Classification 94V-0



MECHANICAL DATA

- ◆ Cass: ITO-220, Full Molded Plastic.
- ◆ Terminals: Plated Leads Solder able per MIL-STD-202 Method 208.
- ◆ Polarity: See Diagram.
- ◆ Weight: 2.24 grams (approx).
- ◆ Mounting: Position : Any.
- ◆ Mounting Torque: 11.5 cm·kg (10 in·lbs) Max.
- ◆ Lead Free: For RoHS/ Lead Free Version.
- ◆ Add "LF" Suffix to Part Number, See Data.


ITO-220		
Dim.	Min.	Max.
A	14.60	15.40
B	9.70	10.30
C	2.55	2.85
D	3.560	4.160
E	13.00	13.80
F	0.30	0.90
G	Φ3.00	Φ3.50
H	6.300	6.900
I	4.200	4.800
J	2.500	2.900
K	0.360	0.800
L	2.900	3.300
P	2.290	2.790

All Dimensions in mm

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS @TA = 25°C unless otherwise specified

Characteristic	Symbol	SB2520	SB2530	SB2540	SB2540	SB2550	SB2560	SB2580	SB25100	Unit
		FCT	FCT	FCT	FCT	FCT	FCT	FCT	FCT	
Peak Repetitive Reverse Voltage	VRRM	20	30	40	45	50	60	80	100	V
Working Peak Reverse Voltage	VRWM									
DC Blocking Voltage	VR									
RMS Reverse Voltage	VR(RMS)	14	21	28	32	35	42	56	70	V
Average Rectified Output Current @Tc=105°C	IO	25.0				25.0				A
Non-Repetitive Peak Forward Surtge Current	IFSM	200				200				A
8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)										
Forward Voltage	@IF=8.0A	0.55			0.75		0.85		V	
Peak Reverse Current	@TA=25°C	0.5								uA
At Rated DC Blocking Voltage	@TA=125°C	100								
Reverse Recovery Time (Note 2)	Cj	1100								pF
Storage Temperature Range	Tj, TSTG	-55 to +150								°C

Note: 1). Measure at 1.0 MHz and Applied reverse voltage of 4.0V.DC.



SINLOON®
POWER SEMICONDUCTORS

SB2520FCT - SB25100FCT

25A Dual Schottky Barrier Rectifier

DATA CURVE

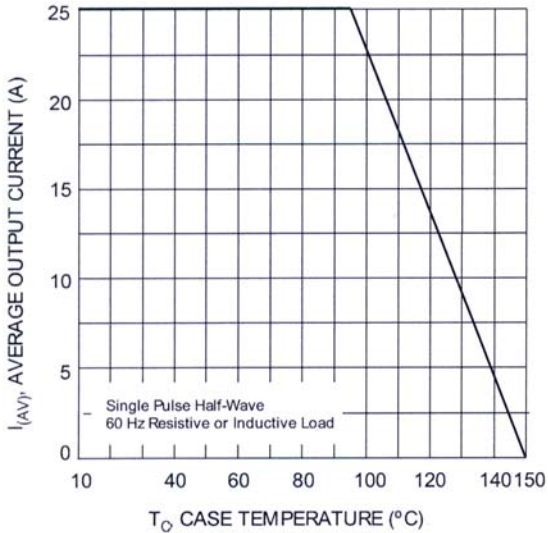


Fig. 1 Forward Current Derating Curve

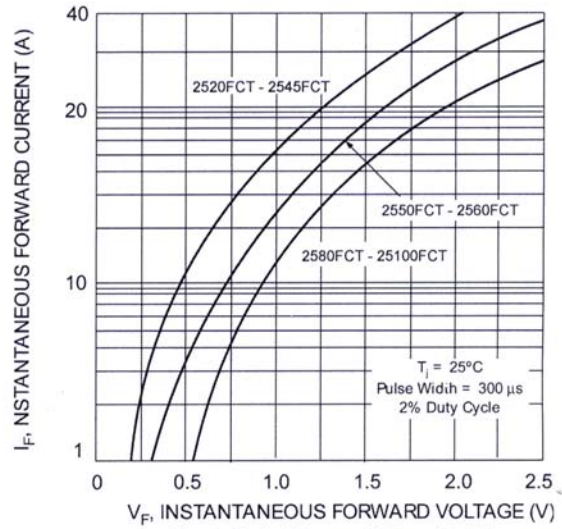


Fig. 2 Typical Forward Characteristics

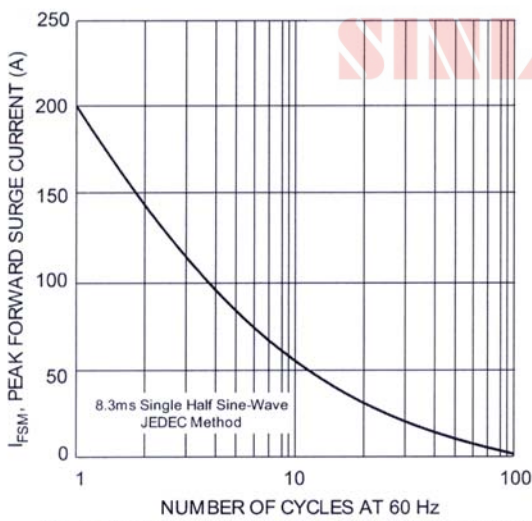


Fig. 3 Maximum Non-Repetitive Peak Fwd Surge Current

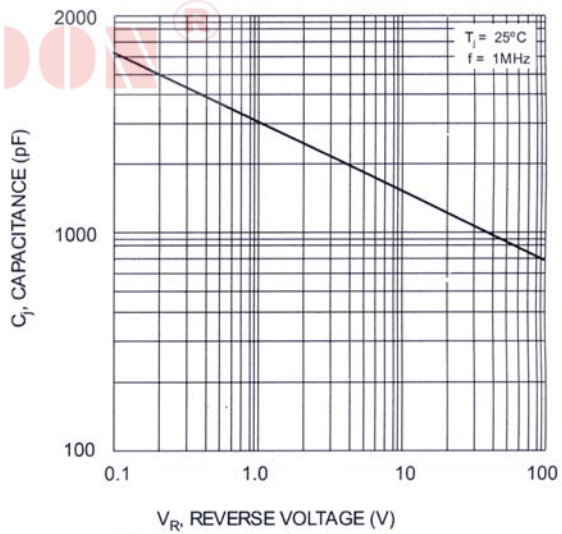


Fig. 4 Typical Junction Capacitance



SINLOON®
POWER SEMICONDUCTORS

SB2520FCT - SB25100FCT

25A Dual Schottky Barrier Rectifier

RECOMMENDED SCREW MOUNTING ARRANGEMENT

- ◆ The full molded plastic package affords a major reduction of hardware as compared to a standard TO-220 package. However, precautions should be made in mounting procedure.
- ◆ A conical washer should be used to apply proper force to the device, Screw should not be tightened with any type of air-forced torque or equipment that may cause crack on device package.
- ◆ A layer of thermal grease or thermal pad in the interface will be considerably helpful for heat dissipation

6-32 HEX Head Screw


Plain Washer

Rectifier Diode

Heatsink

Conical Washer

6-32 HEX Nut



MARKING INFORMATION

XXX	=	Marking Logo
SB25xxFCT	=	Device Number
x	=	20,30,40,45,50,60,60,100.
Polarity	=	As Marked on body.



PACKAGING INFORMATION

Tube Size	Quantity	Inner Box Size	Quantity	Carton Size	Quantity	Approx. Gross Weight
LxWXH (mm)	(Pcs)	LxWXH (mm)	(Pcs)	LxWXH (mm)	(Pcs)	(Kg)
525x31x6	50	555x145x95	2000	572x306x218	8000	19

PACKAGING INFORMATION

Product No.	Package Type	Carton Quantity
SB2520FCT	ITO-220	50 Units/Tube
SB2530FCT	ITO-220	50 Units/Tube
SB2540FCT	ITO-220	50 Units/Tube
SB2545FCT	ITO-220	50 Units/Tube
SB2550FCT	ITO-220	50 Units/Tube
SB2560FCT	ITO-220	50 Units/Tube
SB2580FCT	ITO-220	50 Units/Tube
SB25100FCT	ITO-220	50 Units/Tube

- 1). Ordering Information
Shipping quantity given is for minimum packing quantity only, For minimum. Order quantity, please consult the Sales Department.
- 2). To Order RoHS / Lead Free version (with Lead Free finish) . add "LF" suffix. To part number above. For example.
SB2520FCT-LF