

■ 1.2m Third-generation emergency Light

TP-T58/T8SMD210E3-18W Series

■ Feature:

- * Wide AC input voltage (100-277VAC)
- * imported LED chips, high luminous efficiency, power and energy more saver
- * A grade ternary lithium battery, 2*2.6Ah~3Ah, 3.7V
- Ultra-long emergency time limit, minimum level ≥ 2 hours.
- * Built-in certified emergency power, lifespan, high safety Performance
- * With automatic monthly inspection function, fault alarm function, more intelligent
- * With emergency test button/indicator/battery power switch,
- appearance coordination, beautiful and textured
- * 6063 aluminum with high thermal conductivity, high temperature resistant PC
- * Suitable for warehouses, offices, shopping malls and other places
- * Comply with CE and RoHS standards
- * 2-year warranty

LM79




■ Electrical Specifications:

Model		TP-T58SMD210 E3-18W	TP-T8SMD210 E3-18W
Electrical parameters	Input voltage	100~277VAC	
	Alternating current	0.24A / 100VAC	0.24A / 100VAC
		0.1A / 277VAC	0.1A / 277VAC
	Working frequency	50/60Hz	
	Peak power	23W ± 5%	23W ± 5%
	Rated power	18W ± 5%	18W ± 5%
	Emergency power	8~10W optional	8~10W optional
	Power factor	PF>0.9@100VAC ; 0.84@277VAC	
	Charging time	≥24 hours	
	Emergency duration	≥2 hours (Refer to the timetable for optional)	
	Battery Type	LiCoMnNiO2 Ternary lithium battery 2* 2.6AH~3Ah, 3.7V	
Light parameter	type of light source	SMD2835 LED	
	Number of light sources	210 pcs	210 pcs
	Luminous flux (at full brightness)	>2160 lm± 5%	>2160 lm± 5%
	Color temperature	3000K/4000K/5000K/6000K± 5% (optional)	
	Color Rendering Index	Ra>80	
	Led Luminous Efficiency	>120LM/W (Fully charged state)	
	Beam angle	120°	
	Working Life-span	>30000 Hrs	
Structure	Material	Aluminum+PC	
	Color lampshade	Milky white / transparent	
	Size	"W28.5*H32.5*L1163mm"□	"W28.5*H32.5*L1212mm"□
	Lamp holder type	G5	G13
	Temperature	Temperature-18℃~+43℃ humidity 10~85%RH No condensation	
EMC and safety regulations	Safety regulations	PART 15B, BS EN 60598-1:2015+A1:2018 BS EN 60598-2-22:2014BS EN 61347-2-7 IEC/TR62778:2014BS EN 62493:2015 EN IEC 55015 EN61547EN IEC61000-3-2 EN 61000-3-3+A1, EN 62321 Certified	
	Stress resistant	Input to case 2KVAC	
Packaging	Inside the box	Pearl cotton	
	Carton size	W230 * H215* L1300mm	W230 * H215* L1335mm
	N.W.	~0.595kg	~0.605kg
	Case pack	30Pcs/Cts	
	Carton's Weight	~18kg	~19kg
Remark	※: Contact customer service to provide IES files/integrating sphere reports for each wattage.		

■ 1.2m Third-generation emergency Light

TP-T58/T8SMD210E3-18W Series

■ Product structure size (Unit: mm)

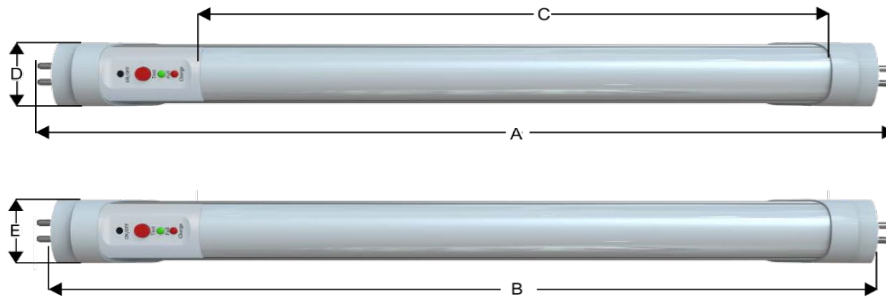

Size Model	A	B	C	D	E
PT-58SMD210E3-18W	563mm	549mm	489mm	25.8mm	32.5mm
TP-T8SMD210E3-18W	603mm	589mm	529mm	28.5mm	32.5mm

■ Emergency discharge time table

Model	Time Battery	2h	2.5h	3h	3.5h	4h	6h
PT-58SMD210E3-18W	2*2.6Ah, 3.7V	Emergency 8W					
PT-T8SMD210E3-18W	2*2.6Ah, 3.7V	Emergency 8W					

Remarks: The emergency duration is related to the emergency power/battery capacity,

■ Function Introsuction

- 1. ON/FF:**Black hidden switch,to active emergency function.
Remark:This switch is default closed before leaving factory.Using a slightly sharped object into the hole to press it, as long as the noise heard means the swich is turned on.At the moment the tube will start emergency function if haven't install into the fixture.When the tube's indicators(red,green) flashing alternately after installing into the fixture means the internal switch is not turned on,Please repress it again.
 - 2. Test:**The red button is for testing the emergency function if normal when the tube is working.When pressed, the lamp immediately starts the emergency state and lights up, and returns to the normal state after releasing it.Each time this button is pressed, the internal program time is cleared, and the automatic detection time is restarted.
 - 3. Full:**The green indicator "steady on" means "the internal battery is fully charged".
 - 4. Charge:**The red indicator "steady on" means the battery is being charged,and will automatically turn off when fully charged.
- Note:** When the red and the green indicator flashing alternately, it means that the ON/OFF switch is not turned on, please press it again. When the emergency function is activated the green and red indicators will go out at the same time.



■ 1.2m Third-generation emergency Light

TP-T58/T8SMD210E3-18W Series



TIPS:

- 1 About automatic detection: as long as the test switch (Test) is pressed, or the mains is re-supplied, the internal program will restart the timer. After 12 hours, the first automatic test will be performed, and the emergency state will be activated for 1 minute. After confirming that the emergency function is normal will return to normal state automatically. If the emergency function is abnormal within 1 minute, the program will automatically resume charging for 1 hour and then re-test. When confirmed it's not normal for the second time, the green indicator will start to flash to alarm, confirming that the internal device is abnormal and cannot work normally, stop using it immediately, Ask a professional to repair or replace it.
- 2 Monthly inspection function: When the product continues to work normally for 30 days, the internal program will automatically start an emergency function test.
- 3 Special situation: When the product lasts for more than 12 hours and the ON/OFF switch is not turned on, the internal program will determine there is a fault, and the green light will flash an alarm. At this time, Need to turn on the ON/OFF switch first, and then press the TEST test button or mains is re-supplied. then can back to normal use.

■ Installation

- ▲ Before installation, confirm whether the connected voltage, frequency, etc. are consistent with the product parameters °
- ▲ Ensure that the input voltage and frequency are within the specified range before installation.
- ▲ It should be installed by qualified professionals, and ensure that the mains is completely turned off before installation °
- ▲ When installing, make sure that the "hidden battery switch button" is in the pressed state, and the traffic lights do not flash alternately °
- ▲ No need for starter and ballast, or please confirm that the above components are disconnected;
- The lamp connection and installation wiring diagram is divided into TYPE-B and TYPE-C, as shown below °
- ▲ After installation, please check carefully, and then test it after confirming that it is correct.

Install the wiring diagram

Figure 1. Wiring diagram without a fire line :


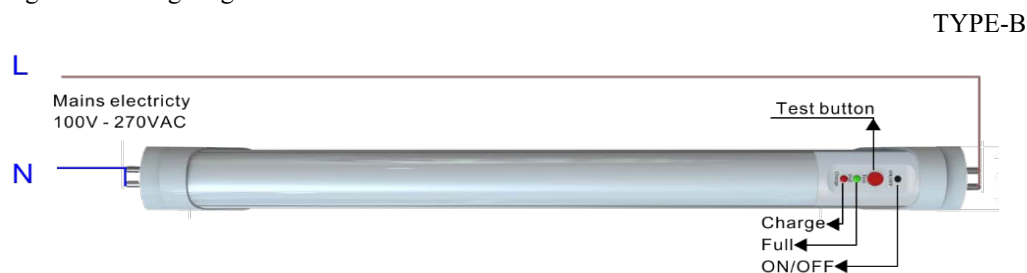


Figure 2. Wiring diagram without a fire line :

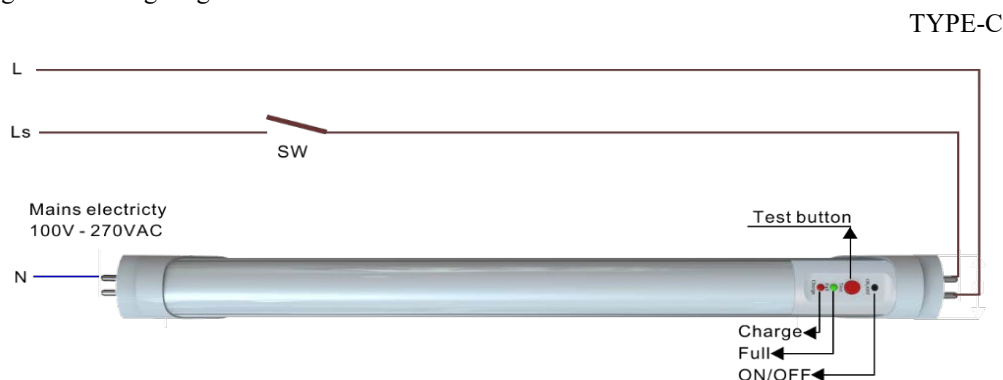

■ 1.2m Third-generation emergency Light

TP-T58/T8SMD210E3-18W Series


■ Precautions

- ▲ The installation wall must be firm and reliable.
- ▲ The installation accessories need to be installed firmly.
- ▲ After the installation and wiring of the light is completed, the power is tested again to guard against electric shock.
- ▲ Please do not open the light and change the electrical structure to prevent damage to the light. The damage caused is not covered by the warranty.
- The lamp can not be illuminated normally or emergency function troubleshooting
 - ▲ After the light is not on, please check if the wiring is connected after power off.
 - ▲ Check whether the black hidden switch is pressed.
 - ▲ If the wiring is normal, no appearance damage, please contact the dealer or service center immediately.
- After-sales service and repair
 - ▲ In any case, if there is a problem, please contact your dealer or service center immediately.
 - ▲ This product is repaired free of charge during the warranty period, and the appropriate material fee will be charged after the expiration of the warranty period.
 - ▲ The company provides a hotline to answer various questions from users.

Please call at 0852-24089788 or email to peter@mayloon.com

■ Product Packaging

Outer carton size : L663*W230*H215mm (T58)/ L703*W230*H215mm(T8)

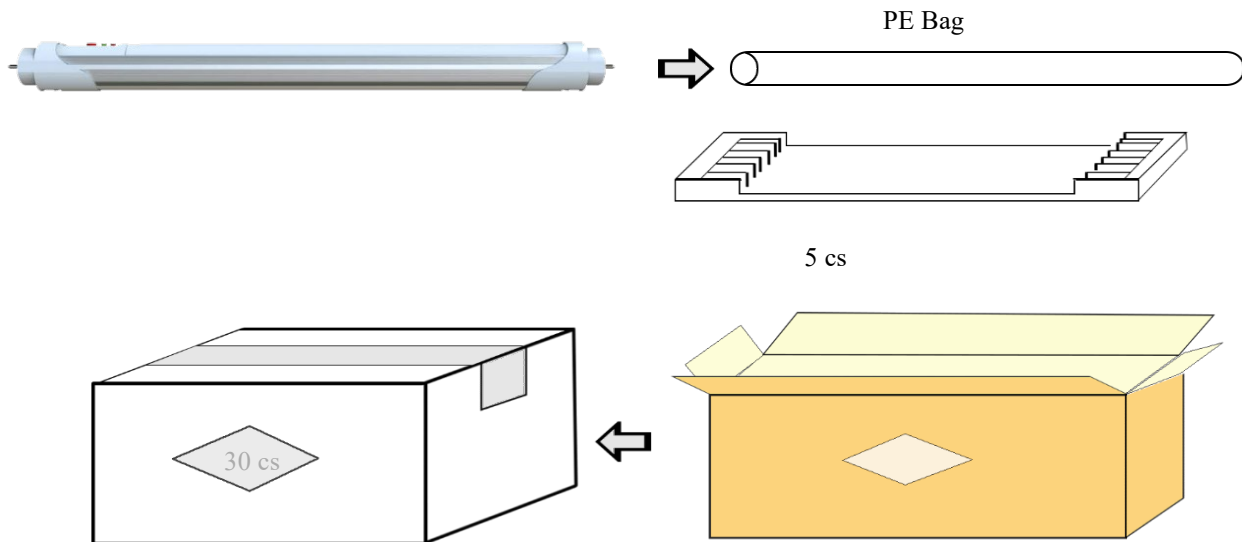

White pearl cotton + kraft carton package, 30cs/carton

■ DISCLAIMER

subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.