
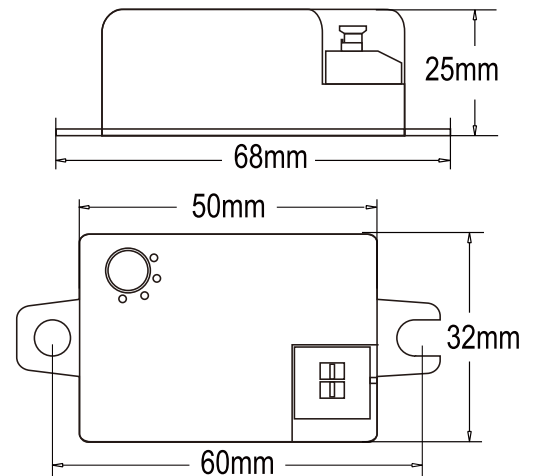


## Microwave (Radar) Sensor Switch Series

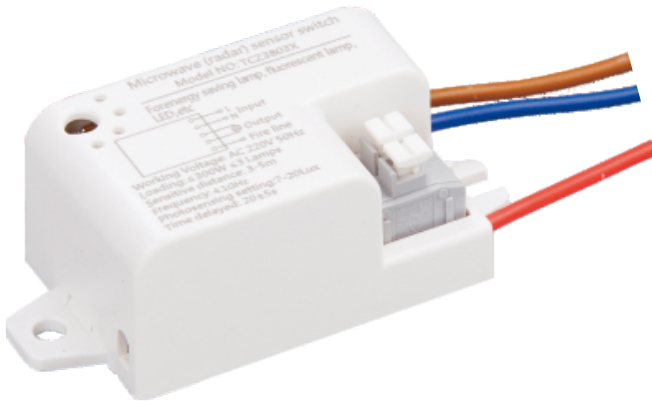

|                           |                                               |
|---------------------------|-----------------------------------------------|
| Model No.                 | TCZ3803X                                      |
| Working Voltage           | AC 220V 50Hz                                  |
| Controllable load         | $\leq 300W \leq 3$ lamps                      |
| Standby power consumption | $\leq 1W$                                     |
| Frequency range           | 4.1GHz $\pm$ 75MHz, ISM wave band             |
| Transmitted power         | <0.5mW                                        |
| Induction radius          | $\geq 3m$                                     |
| Detection Angle           | 360° (ceiling mounting); 160° (wall mounting) |
| Inductive distance        | 3-5m                                          |
| Start Lux Setting         | 7-20Lux                                       |
| Time delayed              | 20 $\pm$ 5secs                                |
| Sensing Speed             | 0.5-3M/s                                      |
| Typical mounting height   | 3m (up to 5m)                                 |
| Operating temperature     | -20°C~45°C                                    |
| IP Rating                 | IP20                                          |
| Size(mm)                  | L68x W32 x H25                                |
| Packing                   | 500pcs / carton                               |