


Microwave(Radar)Sensor Switch Series

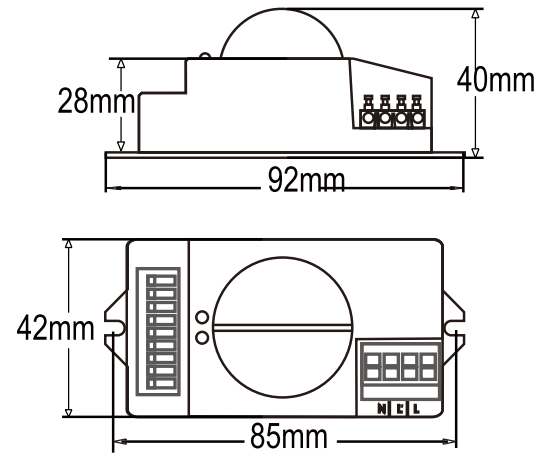

Model No.	TCZ9800MA
Working Voltage	AC220V 50Hz
Controllable Loading	≤100W≤5 lamps
Standby power consumption	≤1W
Frequency range	5.8GHz±75MHz, ISM wave band
Transmitted power	<0.5mW
Induction radius	≥3m
Detection Angle	360° (ceiling mounting);160° (wall mounting)
Inductive distance	5%/10%/30%/40%/50%/60%/80%/100% (Gear selection, 8m Max)
Start Lux Setting	2Lux/5Lux/10Lux/20Lux/30Lux/50Lux/200Lux/Disable (Gear selection)
Time delayed	3secs/6secs/30secs/1mins//3mins/5mins/15mins/30mins (Gear selection)
Sensing Speed	0.5-3M/s
Typical mounting height	3m (up to 6m)
Operating temperature	-20℃~45℃
IP Rating	IP20
Size(mm)	L92xW42xH40
Packing	100PCS/carton