


Microwave (Radar) Sensor Switch Series

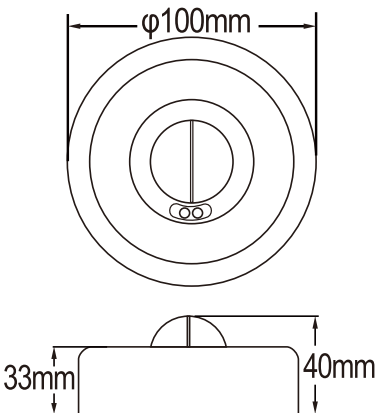

Model No.	TCZ9800R
Working Voltage	AC 85-265V 50/60Hz
Controllable load	≤300W≤3 lamps
Standby power consumption	≤1W
Frequency range	5.8GHz±75MHz, ISMband
Transmitted power	<0.5mW
Induction radius	≥3m
Detection Angle	360° (ceiling mounting);180° (wall mounting)
Inductive distance	5%/10%/30%/40%/50%/60%/80%/100% (Gear selection, 8m Max)
Start Lux Setting	2Lux/5Lux/10Lux/20Lux/30Lux/50Lux/200Lux/Disabie (Gear selection)
Time delayed	3secs/6secs/30secs/1mins//3mins/5mins/15mins/30mins (Gear selection)
Sensing Speed	0.5-3M/s
Typical mounting height	3m (up to 6m)
Operating temperature	-20°C~45°C
IP Rating	IP20
Size(mm)	φ100x H40
Packing	50PCS/carton