

SINLOON®

緊急後備照明燈管
LED Tube - Emergency Lighting

HL-2FT-10W
HL-4FT-22W

□ 消防照明

依[消防安全(商業處所)條例] (572章)，消防處會在一般例行檢查時，會要求商舖，商業寫字樓或廠房，於每個獨立佔用房間內，安裝符合規定的應急照明燈，以便在電力中斷時，提供應急走火逃生照明。

本公司提供的後備LED照明燈管(10W/22W),符合香港消防處之獨立應急照明系統的標準規定設有後備應急電池，可於電力供應中斷時，立即啟動照明。

其它的應急照明還包括有燈泡型(E27-12W),在斷電情況下可維持3小時的照明電力。可當一般家居燈泡使用,照常可控 關燈/熄燈。安裝在工商大廈,酒店或住宅走廊,你就不必再擔心摸黑找路了。


An Emergency Lighting System shall be installed within each separately occupied rooms located within the individual units of the building so as to provide emergency illumination in the event of a power failure.

The Automatic Emergency Light is designed to provide standby but instant lighting at the very moment when sudden power failure occurs.

And it will remain at stand by state again once the main supply is resumed.

□ 規格參數

項目/型號	HL-2FT-10W	HL-4FT-22W
尺寸:	G13-T8-600*26mm	G13-T8-1200*26mm
電壓:	AC110-220V 50/60Hz	AC110-220V 50/60Hz
後備電池:	Lithium (鋰電池)	Lithium (鋰電池)
充電時間:	10小時	10小時
放電:	2小時	2小時
照明光通亮(有電)	900lm	2000lm
照明光通亮(停電)	100lm	200lm
驗證:	符合消防條件	符合消防條件

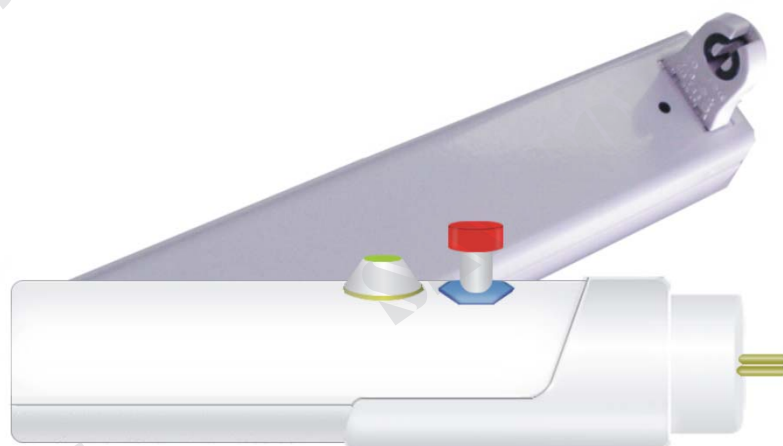

工程質保承諾標誌